

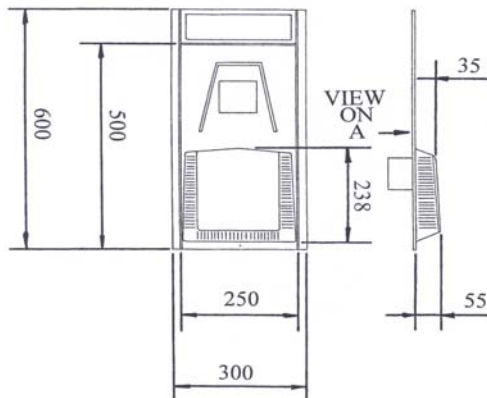


Slate Vent

CODE **GRSV30/25**

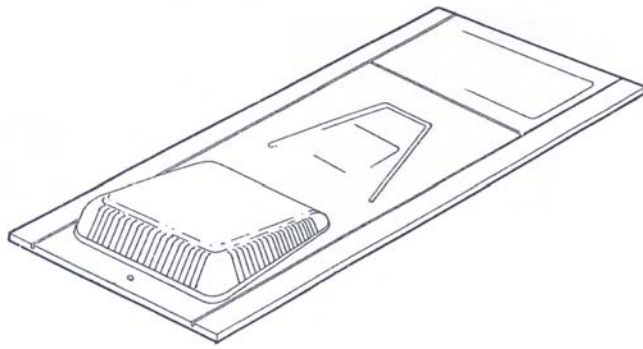

VIEW ON A

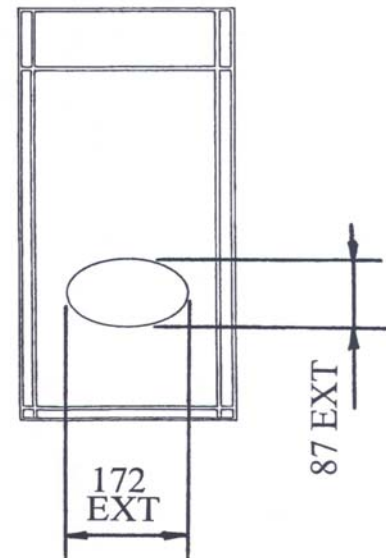

Description:

The GRSV30/25 Slate Vent is manufactured as standard for 600 x 300 slates but can be easily trimmed to fit 500 x 250 slates using the pre marked cut lines.

It can be used for both high and low level roof ventilation requirements. Alternatively it can also be used as an outlet terminal for extraction fans and soil pipe ventilation when used in conjunction with a Manthorpe GRPA Flexible Pipe.

The hood of the GRSV30/25 features a 4mm fly screen to prevent blockage from falling debris and entry of large insects into the roof space.

The GRSV30/25 has been extensively independently wind tunnel tested to the following standards:-

BS 6367 Deluge test 225mm/hour rainfall.
Driving rain test down to a roof pitch of 15 degrees with an up roof wind speed of 13m/s and a rainfall rate of 200mm/hour to generate a fine penetrative spray.

For detailed fitting instructions see MBP 8083.

COLOURS	Black, lightly textured finish
PACKING DETAILS	Packed in 10's in cardboard box
WEIGHT	7kg per box
MATERIAL	Polypropylene
MANUFACTURING PROCESS	Injection Moulded
FREE AIRFLOW	10,000mm ²

References (Extraction):

BSI : BS5534
DOE : Building Regs F1, H1

References (Ventilation):

BRE : DIGEST 262/270
BSI : BS5250
BSI : BS5572
DOE : Building Regs F2
NHBC : Standards 7.2
NHBC : Good Practise Guide

MANTHORPE BUILDING PRODUCTS LTD MANTHORPE HOUSE
BRITAIN DRIVE
CODNOR GATE BUSINESS PARK
RIPLEY
DERBYSHIRE DE5 3ND

TEL: 01773 303 000
FAX: 01773 303 300
EMAIL: mbp.care@manthorpebp.co.uk
WEB: www.manthorpebp.co.uk

DRN M.A Date 21.06.19

The company maintains a policy of continuous development of its product range and reserves the right to amend the specification without notice.

DRG No

MBP 8079

Issue

B